

## ZA95772: MATRIX 6200 / ZENITH 7200 4" FOOT DECK EXTENSION KIT INSTALLATION INSTRUCTIONS


## SAVE THESE INSTRUCTIONS FOR FUTURE USE

## FOOT DECK EXTENSION KIT INSTALLATION


- **⚠ WARNING: Perform extension kit installation ONLY while the bed is unoccupied.**
- 1. Remove mattress retainer(s). Remove footboard and footboard mounting brackets (pinned to the main frame tubes) from the bed. Save hardware for reassembly.

**Note:** Footboards configured with Staff Control: cut cable tie and disconnect Staff Control plug as shown at right **before** removing footboard.


Replace removed footboard mounting brackets with longer footboard mounting brackets provided with extension kit. Fasten footboard mounting brackets to footboard **loosely** at this time, to be tightened later.

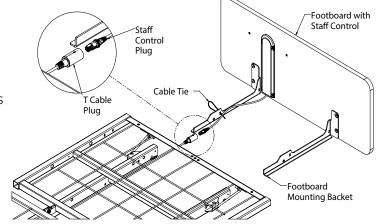

Step 1



Deck Extension Tube
Outter Foot
DeckTuber

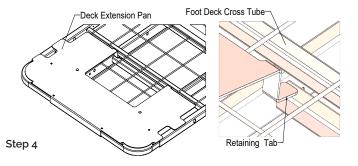


- Remove square caps from foot end of outside foot deck tubes as shown above. If bed has wide kit attached, remove caps from foot end of outer tubes.
- 3. Orient and insert deck extension tubes into outer foot deck tubes as shown above with standard width deck, or to outermost tubes if mounting to wide kit.

Step 3

4. Orient Deck Extension Pan on top of foot deck as shown above; then slide Deck Extension Pan toward head end with retaining tabs located under foot deck crossbrace as shown above.

5. Align Deck Extension Pan holes with foot deck foot end holes as shown at right. **Note:** All models mount at both outside holes in locations shown at right. Secure all models as shown at right with Short Carriage Bolts, Lock Washers, and Threaded Knobs.

6. Secure Deck Extension Tubes to Deck Extension Pan as shown at right.

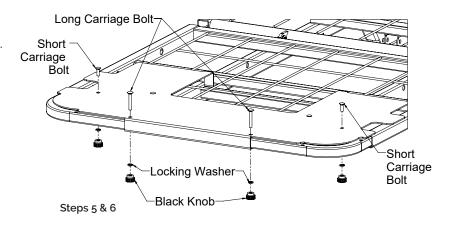

7. Reinstall footboard and mounting brackets into mainframe and pin in place as shown at right. Replace mattress retainer(s).

**Note:** In order to allow footboard mounting tubes to align properly and slide freely, only tighten footboard screws securely after footboard mounting tubes have been reinstalled and pinned into mainframe.

Two Mattress Retainers 999-0814-001 from Kit

Resecure staff control cable
to bracket with cable tie

Slide bracket into rails and align bracket hole with rail hole

Step 7

8. If configured with Staff Control, reconnect Staff Control and test all functions before use. Resecure Staff Control to tube with cable tie.









+1 770.368.4700

Information contained herein is subject to change without notice.
The most current and complete product information can be found on our website.

www.grahamfield.com



